


Product Group: Hooks
Sub Group: 288 Series
Item: Insert Hook

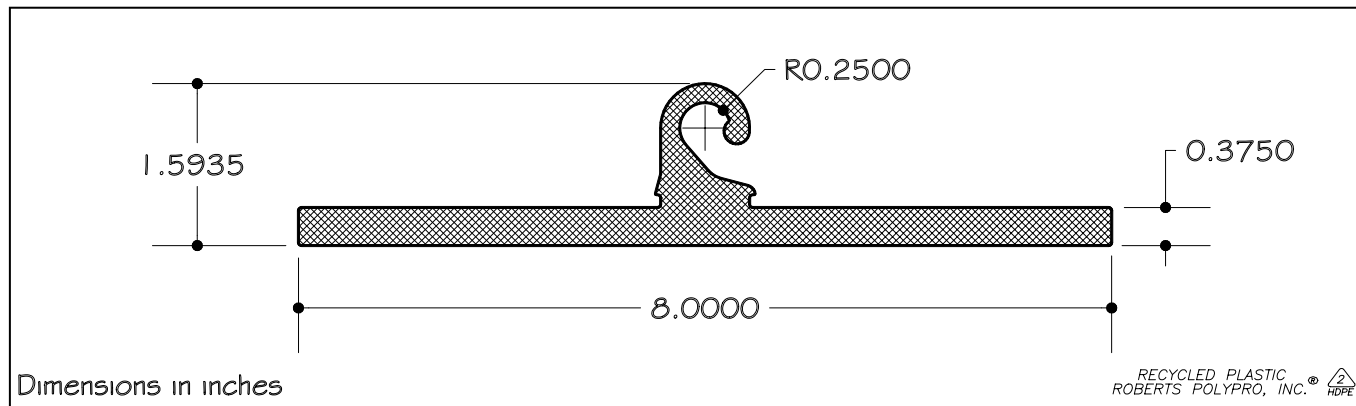

Current Product Numbers

288C.289 Welded, Blue Insert Hook ¹
288C.WHT Welded, White Insert Hook ¹
288C.BLK Welded, Black Insert Hook ¹
Custom Ask us about customizing
a hook to meet your specifications

Quality Specifications

Material: High Density Polyethylene
Thickness: 0.079" ± 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight: 4.60 grams
Cartridge Count: 143 ²
Cartridge Weight: 657.8 grams ²
Weld Strength: 4 lbs. ± 1 lb. ²
Weld Test Frequency: 1 Stick per Cavity - Every Six Cases ²

Packaging Information

Case Quantity:	<i>Loose:</i> N/A	<i>Welded:</i> 2,700
Case Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 19-1/2" × 12-1/8" × 10-1/8"
Pads per Case:	<i>Loose:</i> N/A	<i>Welded:</i> 6
Pad Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 19-3/16" × 11-15/16"
Case Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 29.87 lbs.
Pallet Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 936 lbs.
Cases per Pallet:	<i>Loose:</i> N/A	<i>Welded:</i> 30
Packaging Notes:	<i>Loose</i> - N/A <i>Welded</i> - A 19P pad is placed on the bottom of a 19C case, followed by 4 layers of 4 welded sticks containing 143 parts (minimum) and 1 layer of 3 welded sticks. Each layer is separated by a 19P pad, another 19P pad is placed on top and the box is tape sealed.	

¹ The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

² Applies only to welded hooks.