


Product Specification Sheet

5416 Wyoming Avenue Charlotte, NC 28273 Tel: 704.588.1794

Fax: 704.588.1821

Product Group: Hooks 104 Item: Description: J - Hook

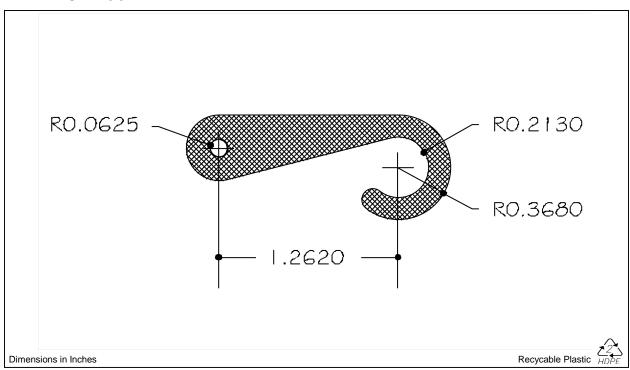

Quality Specifications

270 Material: High Density Polyethylene **Cartridge Count:** 0.043" ± 0.001" **Cartridge Weight:** 113.40 Gauge: Flatness Gauge: 1 Part Thickness Weld Strength: 4lbs. ± 2lb.

Surface Finish: Weld Test Frequency: Every Six Cases, Each Cavity Gloss

Part Weight: 0.42 grams

Ask us about customizing a product to meet your specifications. Custom colors available from Pantone Matching System.

Packaging Information Loose: Case ld: 19C		Welded: Case Id: 15C
Case Quantity:	30,000	32,000
Case Dimensions:	19.5" x 12.125" x 10.125"	15" x 12.25" x 9.25"
Pads per Case:	2	11
Pad Dimensions:	19.1875" x 11.9375"	14.875" x 12.125"
Case Weight:	29.43 lbs	32.33 lbs
Pallet Weight:	Domestic - 1,070 lbs	Domestic - 1,333 lbs
Cases per Pallet:	Domestic - 35	Domestic - 40
Parts per Pallet:	Domestic - 1,050,000	Domestic - 1,280,000

Packaging Notes: Loose - A 19P pad is placed on the bottom of a 19C case, followed by the parts. Then a 19P pad is placed on top and the box is tape sealed. Pallets are stacked with 5 layers, each layer has 7 cases. Welded - A 15P pad is placed on the bottom of a 15C case, followed by 10 layers of 12 welded sticks containing 270 parts (minimum). Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed. Pallets are stacked with 5 layers, each layer has 8 cases.

SHEET Revision: 05/07/2008