




Product Specification Sheet

5416 Wyoming Avenue
Charlotte, NC 28273
Tel: 704.588.1794
Fax: 704.588.1821

Product Group: **Hooks**
Item: **2236**
Description: **Insert Hook**

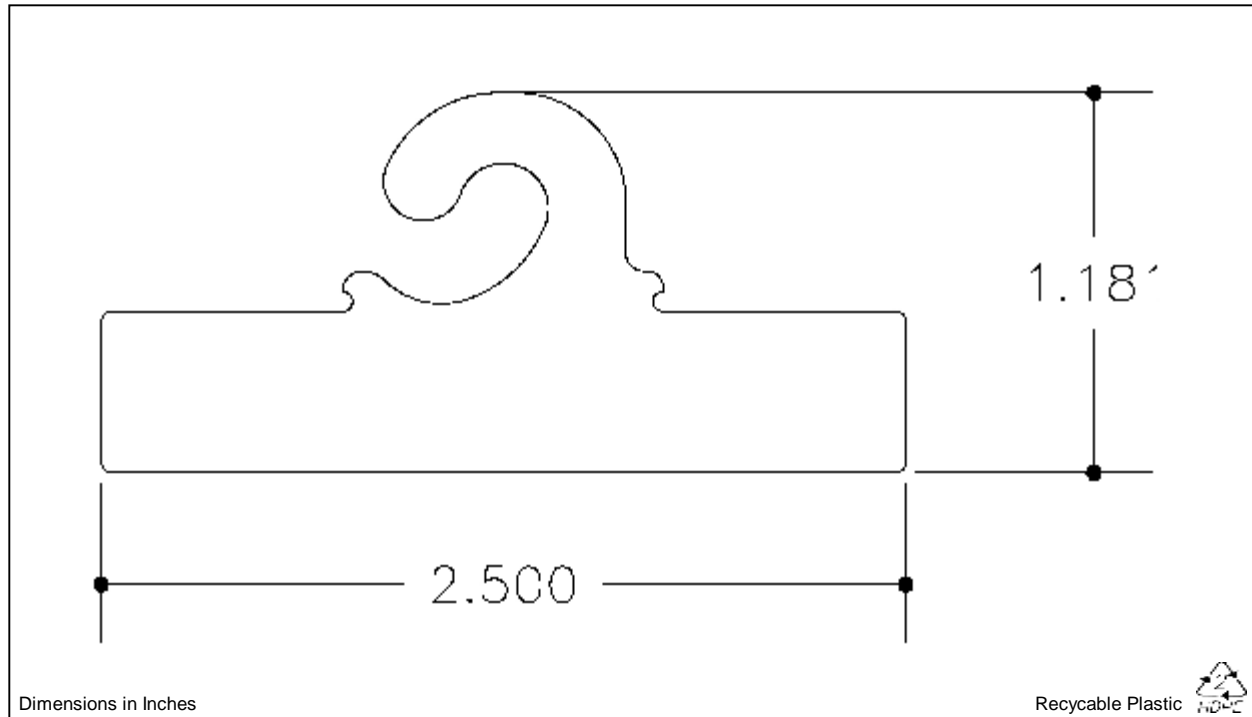

Quality Specifications

Material: High Density Polyethylene
Gauge: 0.059" \pm 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight : 1.50 grams

Cartridge Count: 205
Cartridge Weight: 307.50
Weld Strength: 4lbs. \pm 1lb.
Weld Test Frequency : Every 6 Cases, 1 Per Cavity

*Ask us about customizing a product to meet your specifications.
Custom colors available from Pantone Matching System.*

Packaging Information		Loose:	Case Id:	Welded:	Case Id: 15C
Case Quantity:	N/A			11,275	
Case Dimensions:	N/A			15" x 12.25" x 9.25"	
Pads per Case:	N/A			5	
Pad Dimensions:	N/A			14.875" x 12.125"	
Case Weight:	N/A			37.25 lbs	
Pallet Weight:	N/A			Domestic - 1,530 lbs	
Cases per Pallet:	N/A			Domestic - 40	
Parts per Pallet:	N/A			Domestic - 451,000	

Packaging Notes: Loose - NA. Welded - A 15P pad is placed on the bottom of a 15C case, followed by 5 layers of 11 welded sticks containing 205 parts (minimum). Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.