


Product Group: **Hooks**
Item: **2246BC**
Description: **Insert Hook**

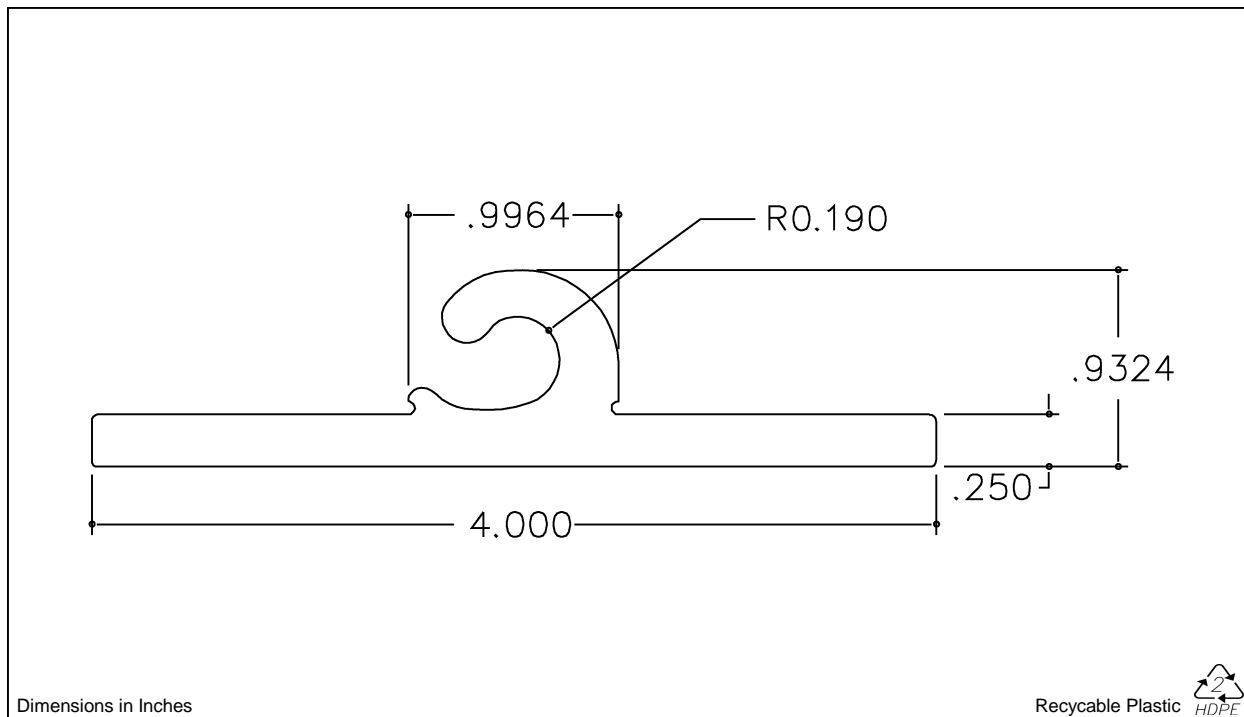

Quality Specifications

Material:	High Density Polyethylene	Cartridge Count:	250
Gauge:	0.059" ± 0.001"	Cartridge Weight:	312.50
Flatness Gauge:	1 Part Thickness	Weld Strength:	4lbs. ± 2lb.
Surface Finish:	Gloss	Weld Test Frequency :	Every 6 Cases, 1 Per Cavity
Part Weight :	1.25 grams		

*Ask us about customizing a product to meet your specifications.
Custom colors available from Pantone Matching System.*

Packaging Information		Loose:	Case Id:	Welded:	Case Id: 15C
Case Quantity:	N/A			8,200	
Case Dimensions:	N/A			15" x 12.25" x 9.25"	
Pads per Case:	N/A			8	
Pad Dimensions:	N/A			14.875" x 12.125"	
Case Weight:	N/A			24.61 lbs	
Pallet Weight:	N/A			Domestic - 1,024 lbs	
Cases per Pallet:	N/A			Domestic - 40	
Parts per Pallet:	N/A			Domestic - 328,000	

Packaging Notes: Loose - N/A. Welded - A 15P pad is placed on the bottom of a 15C case, followed by 6 layers of 5 welded sticks containing 250 parts (minimum), and 1 layer of 3 welded sticks. Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.