


Product Group: Hooks
Sub Group: 266 Series
Item: Insert Hook

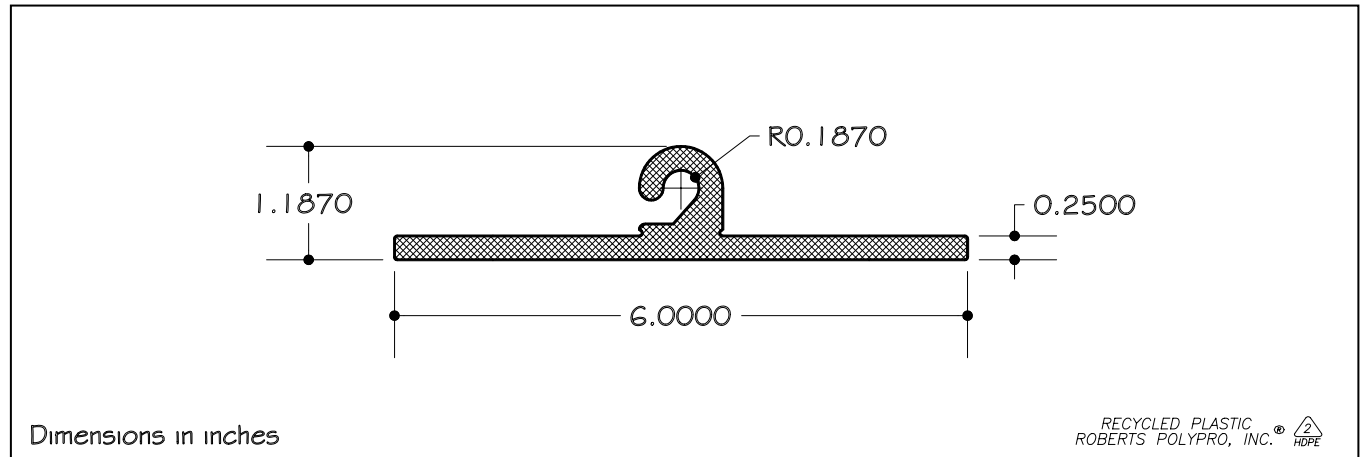

Current Product Numbers

266C.210 Welded, Pink Insert Hook ¹
266C.485 Welded, Red Insert Hook ¹
266C.BLK Welded, Black Insert Hook ¹
266C.NAT Welded, Natural Insert Hook ¹
266C.WHT Welded, White Insert Hook ¹
Custom Ask us about customizing
a hook to meet your specifications

Quality Specifications

Material: High Density Polyethylene
Thickness: 0.059" ± 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight: 1.83 grams
Cartridge Count: 242 ²
Cartridge Weight: 442.9 grams ²
Weld Strength: 4 lbs. ± 1 lb. ²
Weld Test Frequency: 1 Stick per Cavity - Every Six Cases ²

Packaging Information

Case Quantity:	<i>Loose:</i> N/A	<i>Welded:</i> 4,100
Case Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 15" × 12-1/4" × 9-1/4"
Pads per Case:	<i>Loose:</i> N/A	<i>Welded:</i> 7
Pad Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 14-7/8" × 12-1/8"
Case Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 18.64 lbs.
Pallet Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 600 lbs.
Cases per Pallet:	<i>Loose:</i> N/A	<i>Welded:</i> 40
Packaging Notes:	<i>Loose</i> - N/A <i>Welded</i> - A 15P pad is placed on the bottom of a 15C case, followed by 5 layers of 3 welded sticks containing 242 parts (minimum) and 1 layer of 2 welded sticks. Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.	

¹ The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

² Applies only to welded hooks.