


Product Group: Hooks  
Sub Group: 266B Series  
Item: Insert Hook

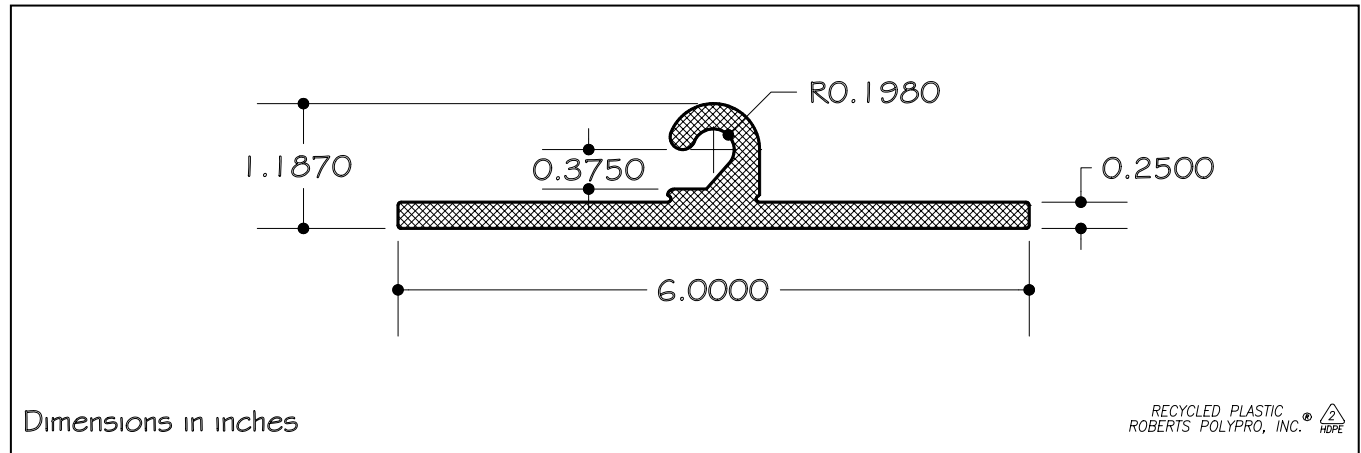

## Current Product Numbers

**266BC.210** Welded, Pink Insert Hook <sup>1</sup>  
**266BC.485** Welded, Red Insert Hook <sup>1</sup>  
**266BC.BLK** Welded, Black Insert Hook <sup>1</sup>  
**266BC.NAT** Welded, Natural Insert Hook <sup>1</sup>  
**266BC.WHT** Welded, White Insert Hook <sup>1</sup>  
**Custom** Ask us about customizing  
a hook to meet your specifications

## Quality Specifications

**Material:** High Density Polyethylene  
**Thickness:** 0.059" ± 0.001"  
**Flatness Gauge:** 1 Part Thickness  
**Surface Finish:** Gloss  
**Part Weight:** 1.83 grams  
**Cartridge Count:** 242 <sup>2</sup>  
**Cartridge Weight:** 442.9 grams <sup>2</sup>  
**Weld Strength:** 4 lbs. ± 1 lb. <sup>2</sup>  
**Weld Test Frequency:** 1 Stick per Cavity - Every Six Cases <sup>2</sup>

## Packaging Information

<b>Case Quantity:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 4,100
<b>Case Dimensions:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 15" × 12-1/4" × 9-1/4"
<b>Pads per Case:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 7
<b>Pad Dimensions:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 14-7/8" × 12-1/8"
<b>Case Weight:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 18.64 lbs.
<b>Pallet Weight:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 600 lbs.
<b>Cases per Pallet:</b>	<i>Loose:</i> N/A	<i>Welded:</i> 40

**Packaging Notes:** *Loose* - N/A *Welded* - A 15P pad is placed on the bottom of a 15C case, followed by 5 layers of 3 welded sticks containing 242 parts (minimum) and 1 layer of 2 welded sticks. Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.

<sup>1</sup> The procedure used in welding these products is an exclusive, patented Roberts Polypro process.

<sup>2</sup> Applies only to welded hooks.