


Product Group: Hooks  
Sub Group: 2769 Series  
Item: Insert Hook

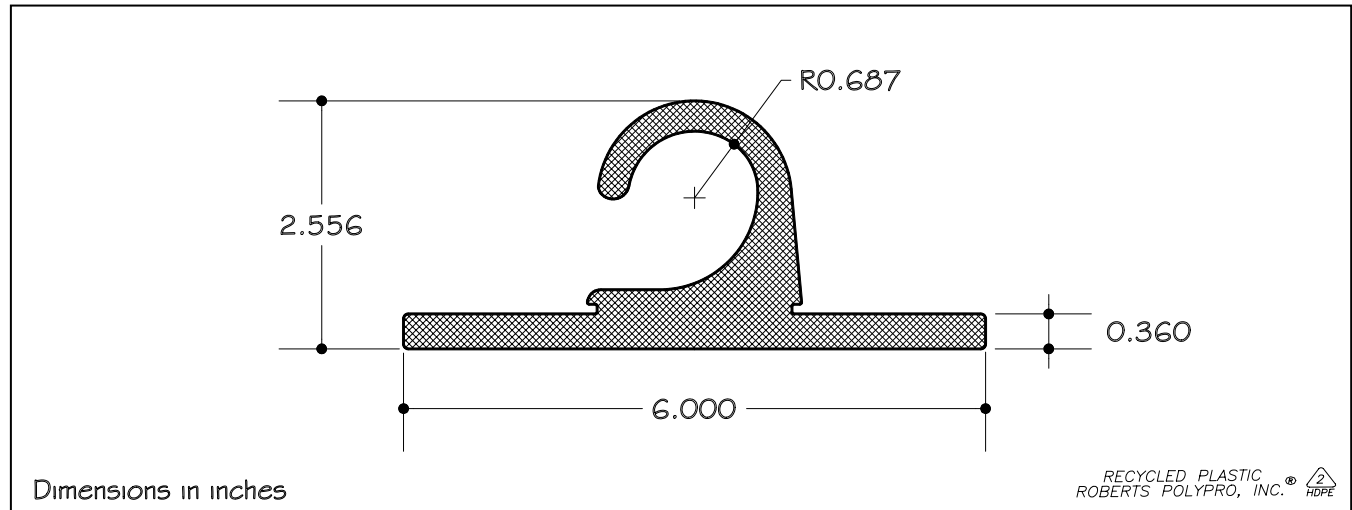

## Current Product Numbers

**2769C.BLK** Welded, Black Insert Hook <sup>1</sup>  
**2769C.NAT** Welded, Natural Insert Hook <sup>1</sup>  
**2769C.WHT** Welded, White Insert Hook <sup>1</sup>  
**2769L.WHT** Loose, White Insert Hook  
**Custom** Ask us about customizing  
a hook to meet your specifications

## Quality Specifications

**Material:** High Density Polyethylene  
**Thickness:** 0.089" ± 0.001"  
**Flatness Gauge:** 1 Part Thickness  
**Surface Finish:** Gloss  
**Part Weight:** 5.57 grams  
**Cartridge Count:** 137 <sup>2</sup>  
**Cartridge Weight:** 763.09 grams <sup>2</sup>  
**Weld Strength:** 4 lbs. ± 1 lb. <sup>2</sup>  
**Weld Test Frequency:** 1 Stick per Cavity - Every Six Cases <sup>2</sup>

## Packaging Information

<b>Case Quantity:</b>	<i>Loose:</i> 2,000	<i>Welded:</i> 2,050
<b>Case Dimensions:</b>	<i>Loose:</i> 19-1/2" × 12-1/8" × 10-1/8"	<i>Welded:</i> 19-1/2" × 12-1/8" × 10-1/8"
<b>Pads per Case:</b>	<i>Loose:</i> 2	<i>Welded:</i> 4
<b>Pad Dimensions:</b>	<i>Loose:</i> 19-3/16" × 11-15/16"	<i>Welded:</i> 19-3/16" × 11-15/16"
<b>Case Weight:</b>	<i>Loose:</i> 26.21 lbs.	<i>Welded:</i> 27.24 lbs.
<b>Pallet Weight:</b>	<i>Loose:</i> 826 lbs.	<i>Welded:</i> 857 lbs.
<b>Cases per Pallet:</b>	<i>Loose:</i> 30	<i>Welded:</i> 30
<b>Packaging Notes:</b>	<i>Loose</i> - A 19P pad is placed on the bottom of a 19C case, followed by the parts. Then a 19P pad is placed on top and the box is tape sealed. <i>Welded</i> - A 19P pad is placed on the bottom of a 19C case, followed by 3 layers of 5 welded sticks containing 137 parts (minimum). Each layer is separated by a 19P pad, another 19P pad is placed on top and the box is tape sealed.	

<sup>1</sup> The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

<sup>2</sup> Applies only to welded hooks.