


Product Group: Hooks
 Sub Group: 2789C Series
 Item: Insert Hook

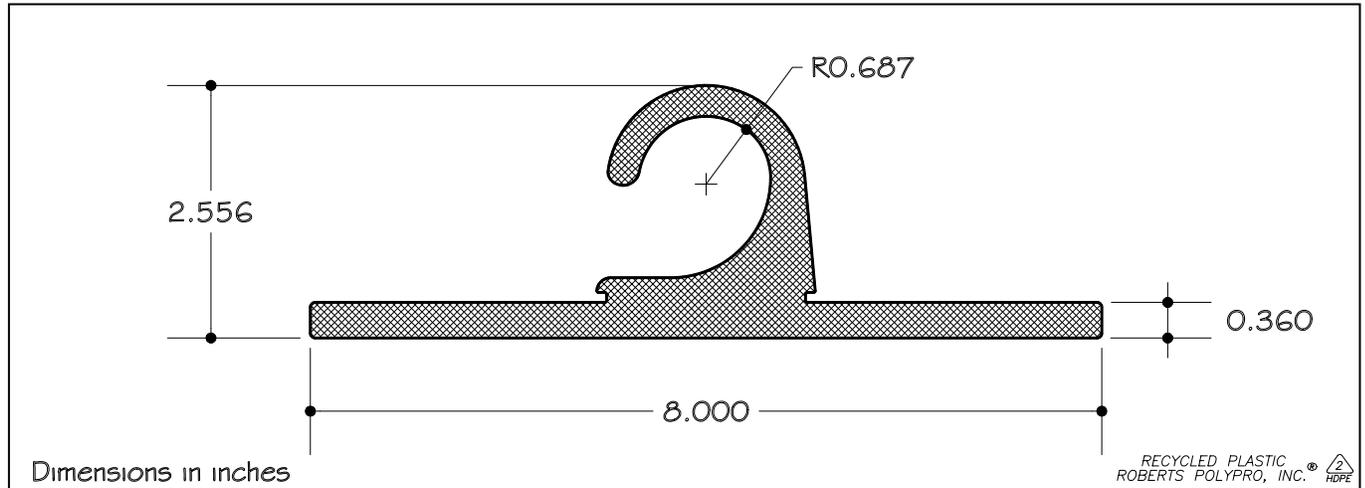

Current Product Numbers

2789C.BLK Welded, Black Insert Hook ¹
2789C.NAT Welded, Natural Insert Hook ¹
2789C.WHT Welded, White Insert Hook ¹
Custom Ask us about customizing
 a hook to meet your specifications

Quality Specifications

Material: High Density Polyethylene
Thickness: 0.089" ± 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight: Not Available
Cartridge Count: Not Available ²
Cartridge Weight: Not Available ²
Weld Strength: 4 lbs. ± 1 lb. ²
Weld Test Frequency: 1 Stick per Cavity - Every Six Cases ²

Packaging Information

Case Quantity:	<i>Loose:</i> N/A	<i>Welded:</i> 1,600
Case Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> Not Available
Pads per Case:	<i>Loose:</i> N/A	<i>Welded:</i> Not Available
Pad Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> Not Available
Case Weight:	<i>Loose:</i> N/A	<i>Welded:</i> Not Available
Pallet Weight:	<i>Loose:</i> N/A	<i>Welded:</i> Not Available
Cases per Pallet:	<i>Loose:</i> N/A	<i>Welded:</i> 30
Packaging Notes:	<i>Loose - N/A Welded - Not available</i>	

¹ The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

² Applies only to welded hooks.