


Product Group: **Hooks**  
 Item: **335**  
 Description: **Universal Hook**

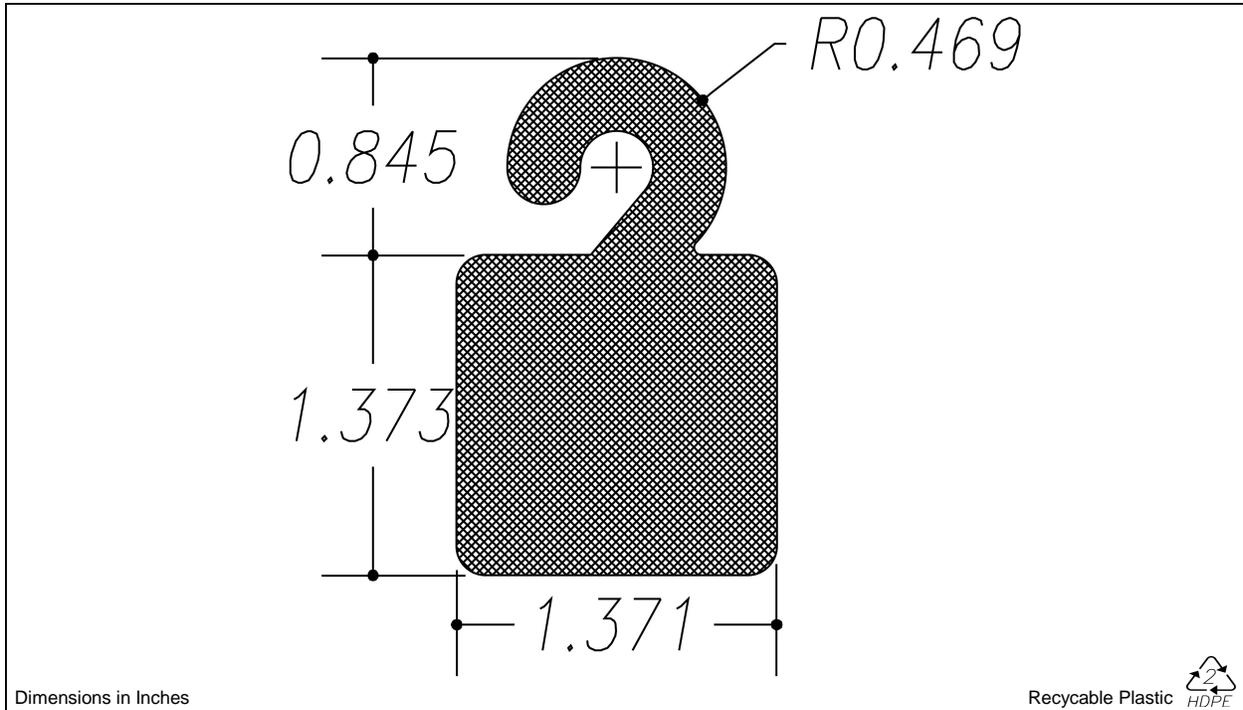

## Quality Specifications

<b>Material:</b>	High Density Polyethylene	<b>Cartridge Count:</b>	233
<b>Gauge:</b>	0.049" ± 0.001"	<b>Cartridge Weight:</b>	410.08
<b>Flatness Gauge:</b>	1 Part Thickness	<b>Weld Strength:</b>	4lbs. ± 1lb.
<b>Surface Finish:</b>	Gloss	<b>Weld Test Frequency :</b>	Every 6 Cases, 1 Per Cavity
<b>Part Weight :</b>	1.76 grams		

*Ask us about customizing a product to meet your specifications.  
 Custom colors available from Pantone Matching System.*

Packaging Information	Loose: Case Id: 15C		Welded: Case Id: 19C	
	<b>Case Quantity:</b>	6,000		13,000
<b>Case Dimensions:</b>	15" x 12.25" x 9.25"		19.5" x 12.125" x 10.125"	
<b>Pads per Case:</b>	2		5	
<b>Pad Dimensions:</b>	14.875" x 12.125"		19.187" x 11.937"	
<b>Case Weight:</b>	24.63 lbs		52.72 lbs	
<b>Pallet Weight:</b>	Domestic - 1,025 lbs	International - 1,419 lbs	Domestic - 1,885 lbs	
<b>Cases per Pallet:</b>	Domestic - 40	International - 56	Domestic - 35	
<b>Parts per Pallet:</b>	Domestic - 240,000	International - 336,000	Domestic - 455,000	

**Packaging Notes:** *Loose - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. Welded - A 19P pad is placed on the bottom of a 19C case, followed by 4 layers of 14 welded sticks containing 233 parts (minimum). Each layer is separated by a 19P pad, another 19P pad is placed on top and the box is tape sealed.*