


Product Group: **Hooks**
Item: **525**
Description: **Glove Hook**

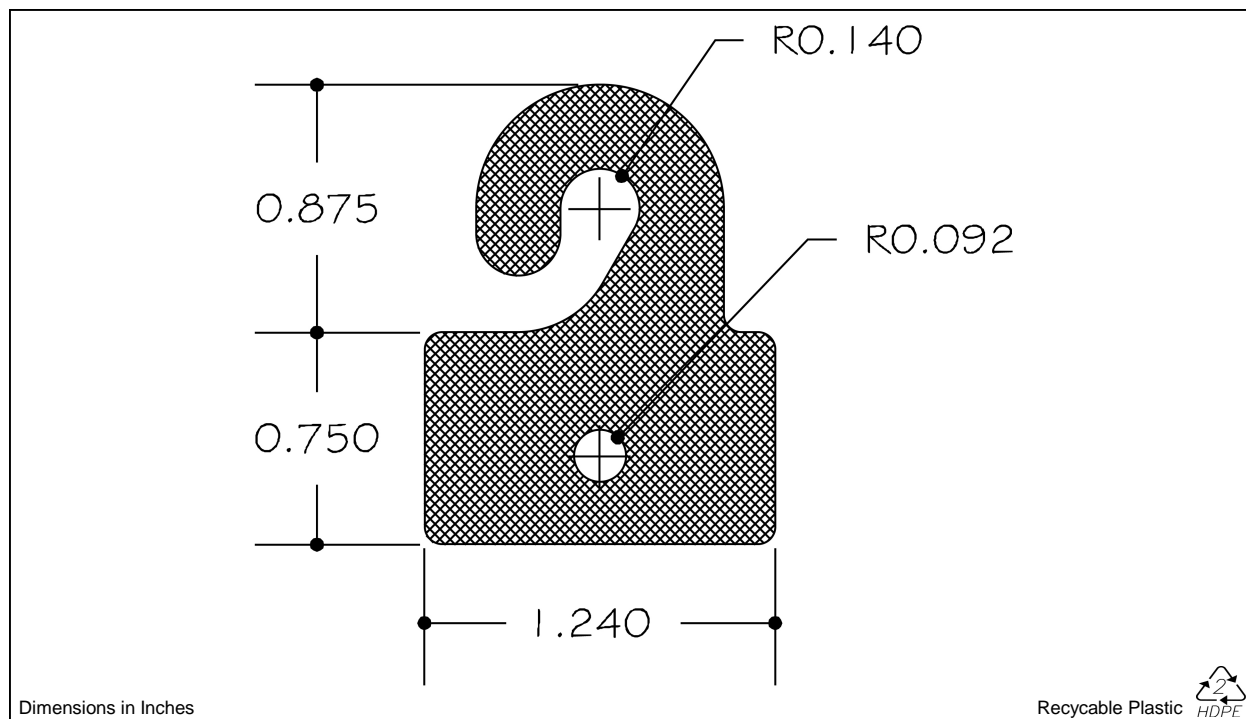

Quality Specifications

Material: High Density Polyethylene
Gauge: 0.049" \pm 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight : 1.22 grams

Cartridge Count: 234
Cartridge Weight: 285.48
Weld Strength: 4lbs. \pm 1lb.
Weld Test Frequency : Every 6 Cases, 1 Per Cavity

*Ask us about customizing a product to meet your specifications.
Custom colors available from Pantone Matching System.*

Packaging Information		Loose: Case Id: 15C	Welded: Case Id: 15C
Case Quantity:	10,000	14,000	
Case Dimensions:	15" x 12.25" x 9.25"	15" x 12.25" x 9.25"	
Pads per Case:	2	6	
Pad Dimensions:	14.875" x 12.125"	14.875" x 12.125"	
Case Weight:	23.84 lbs	33.43 lbs	
Pallet Weight:	Domestic - 994 lbs	Domestic - 1,377 lbs	
Cases per Pallet:	Domestic - 40	Domestic - 40	
Parts per Pallet:	Domestic - 400,000	Domestic - 560,000	

Packaging Notes: Loose - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. Welded - A 15P pad is placed on the bottom of a 15C case, followed by 5 layers of 12 welded sticks containing 234 parts (minimum). Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.